


//// dedalo
b-saurio
BASS DISTORTION

Congratulations, you got the B-saurio!

With its double gain and distortion controls, the B-Saurio simply has the greatest distortion power for your bass. Its innovative design uses a mixture of IR LED and FET transistors, and a Blend control which allows you to mix the distortion with a low-pass filtered signal, to keep the impact of your low frequencies.

- Wide range of distortion
- Analog circuit with IR-LED/FET clipping
- Blend control to mix clean low frequencies and avoid bass losses
- Independent controls for low-frequency gain and mid-frequency distortion
- True bypass

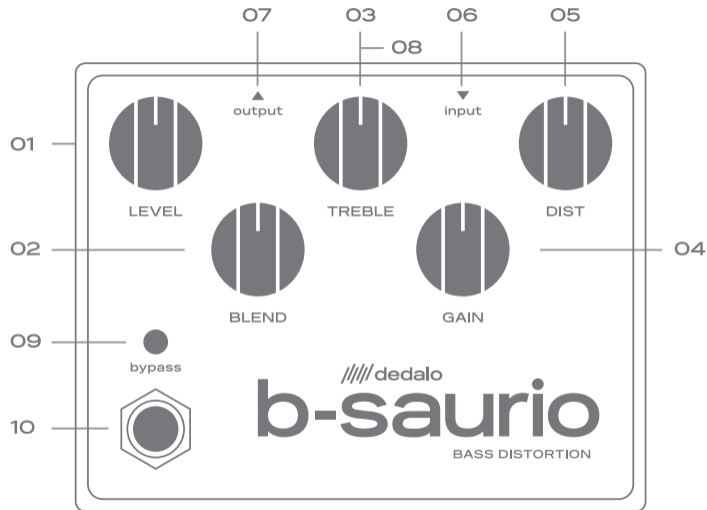

Controls

01 - LEVEL Output level of the effect.

02 - BLEND Level of the clean signal, which is added in parallel to the distortion. This clean signal is filtered to keep only the lower frequencies, and allows you to get the desired bottom end in all levels of distortion. Match appropriately with the Level control.

03 - TREBLE Treble control. Turn to the right for an open and bright tone, and to the left for a darker sound.

04 - GAIN Amount of gain applied at the input of the pedal. This gain is centered around the low and mid-low frequencies, and allows you to get sounds with more weight and growl.

05 - DIST Gain of the distortion stage. This control is centered on the higher mids, and allows you to get high levels of distortion. Combine with the GAIN control to get a wide variety of sounds.

06 - INPUT Effect input, connect your instrument here.

07 - OUTPUT Effect output, connect your amplifier here.

08 - DC 9V Power supply input, connect your dc adapter here.

Controls

09 - LED Lights up when the effect is engaged.

10 - TRUE BYPASS Turns on/off the effect. The true bypass switch keeps your sound intact when the effect is off.

Order in the effects chain



Technical specifications

Model 2014 – BSR-1

True Bypass

Input impedance: 750Kohm

Power Input: DC 9v center negative (minimum 100mA)

Battery power: 9v Alkaline

Consumption: 25mA at 9v DC

Dimensions: 12cm x 9.4cm x 5.4cm

Weight: 475gr

Use and care of the pedal

- To place a battery, remove the lid by removing screws.
- Use only regulated 9v dc adapter, with negative center polarity. In no way should be connected to 220V or adapters of other kinds.
- Avoid dropping, hitting or exposing the pedal to extremes of humidity or temperature.
- Disconnect the input when the pedal is not in use to avoid battery drain.
- Remove the battery if you don't plan to use the pedal for a long time.
- To clean the pedal, use a dry cloth.
- Do not remove the protective silicone legs, they protect the pedal from shocks and external pressures.

Problems and solutions

- *The LED lights up but there is only sound when the effect is in bypass:*
Make sure the instrument is properly connected to the INPUT jack, and the amplifier to the OUTPUT jack.
- *The indicator LED doesn't light up:*
The pedal is not connected to a working DC adapter, or to a charged battery.
- *The effect is too weak, or the sound is unduly saturated:*
Put a new battery or try an appropriate DC adapter. If the pedal is connected in a loop, check its send and return levels.
- *The pedal makes a high pitched whine:*
The battery has insufficient charge.
- *The pedal makes a low pitched hum:*
Feed the pedal with a regulated dc adapter of sufficient amperage
- *The sound cuts out intermittently:*
This may be due to a failure in the true bypass switch. See warranty terms.

Terms of warranty

- The warranty is only valid for the original owner for 2 years from the date of purchase.
- The warranty must be requested on the trade where the pedal was acquired.
- DEDALO ensures that the pedal is free from defects in materials and workmanship.
- DEDALO will choose to repair or replace any faulty piece on the pedal at its sole option.
- Failures due to accident or misuse are not covered in the warranty.
- DEDALO is not responsible for any loss or damage the user may suffer as a result of using the pedal.
- Batteries or power adapter are not included in the warranty.
- In this pedal there is no piece that could be repaired by the user. The repair or modification by personnel not authorized by DEDALO will void the warranty.
- Shipping or other fees that may arise, are not covered by warranty.

Sound Settings

Register your pedal!

www.dedalofx.com.ar/register

www.dedalofx.com.ar


Sound Settings



Good drive



Mid scooped distortion

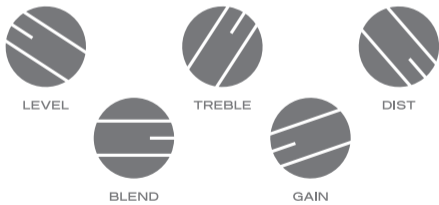


Sound Settings



Enhance edge



Growling tone

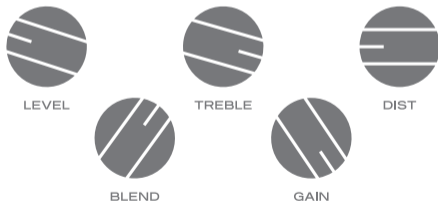

Sound Settings



LEVEL



TREBLE



DIST



BLEND



GAIN

Fuzzed out

MADE IN ARGENTINA

